




40W OFCA Series Power Supply

Features:

- * Universal AC Input 90-264Vac
- * Output Voltage: 3.3-48Vdc
- * Output Current: 0-6A
- * High Efficiency up to 87%
- * Certified With UL/cUL/CE
- * Compact size 2 x 4 inches

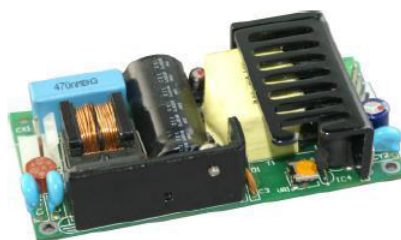

Input	
Voltage (Vac)	90 - 264
Current (A)	1.5
Line Frequency (Hz)	50-60
Inrush Current	50A

Output	
Output Voltage & Current	See below table
Load Regulation	+/-1% (Typical)
Line Regulation	+/-0.5% (Typical)
Ripple & Noise	1% Vp-p Max
Holding Time	8mS @ Full Load
Protection	Over Load Protection
Efficiency	Up to 87%

Enviromental	
Operating Temperature	-10 to +70 degree celsius
Storage Temperature	-20 to +85 degree celsius
Operating Relative Humidity	5 to 95% RH
Storage Relative Humidity	5 to 95% RH

Safetys, EMI & EMS	
Safety	Certified With UL/cUL/CE
Hi-Pot	4242 Vdc
EMI	Compliance to EN 55022 / CISPR 22 & FCC Part 15
EMS	Compliance to EN61000-4-2,3,4,5,6,8,11

Mechanical	
Dimension	101.6 x 50.8 x 30.48 mm, Tolerance +/- 0.4mm
Connector	CN1 --- AC input: Molex 5273-03A withdraw 1 pin or equivalent. CN2 --- DC output: Molex 5273-04A or equivalent.

PART NUMBER	OUTPUT VOLTAGE (Vdc)	OUTPUT CURRENT (Amp)	WATTAGE (W)
OFCA-3360A	3.3	6.0	20
OFCA-5060A	5.0	6.0	30
OFCA-9044A	9.0	4.4	40
OFCA-1233A	12.0	3.3	40
OFCA-1329A	13.8	2.9	40
OFCA-1526A	15.0	2.6	40
OFCA-2416A	24.0	1.6	40
OFCA-3013A	30.0	1.3	40
OFCA-3611A	36.0	1.1	40
OFCA-4883A	48.0	0.83	40