



**Customer:**

**Customer Model Number:**

**Product Part Number:** PS-2437APL05

### 1. Input Requirement

Voltage	Universal 100 – 240Vac, Single Phase
Frequency	50 – 60 Hz
Current	1.2A Maximum
Inrush Current	60A Max. / 230Vac (Cold Start At 25 °C , Full Load)
Efficiency	Eff (av) $\geq$ 88 % (At 115 Vac & 230 Vac)
Power Consumption	Pi $\leq$ 0.21 W (At 230 Vac & No Load)
Power Factor (PF)	PF $\geq$ 0.9 (At Full Load)

### 2. Output Requirement

DC Output Voltage	+24V $\pm$ 5%
DC Output Current	3.75A Maximum
Regulation	22.80Vmin. ~ 24.00Vtyp. ~ 25.20Vmax.
Ripple & Noise	240 mVpp Max.
Total Power	90W Maximum

**Remark:** For ripple & noise measurement, use a 20MHz bandwidth frequency oscilloscope, and add a 0.1 $\mu$ F multilayer Cap. and a Low ESR Electrolytic Cap. (10  $\mu$ F ) at output connector terminals. (At nominal line voltage, Full Load)

### 3. Protection

#### Over Voltage Protection

Over voltage protection shall be included in the adaptor circuit. A single component failure must not cause an over voltage.

#### Over Current Protection

The adaptor must have a current limiting function on the output voltage. in overload mode, the output must drop to a low voltage.

#### Short Circuit Protection

The adaptor must withstand a continuous short circuit on the output without damage.

### 4. Environmental Requirement

**Operating Temperature:** 0°C ~ +40°C

**DWG Control Number:**

**Revision:**

**Date:** 09/27/2017



**Storage Temperature:** -20°C ~ +80°C

**Operating Humidity:** 20% ~ 80%RH

**Storage Humidity:** 10% ~ 90%RH

**Cooling Method:** By Natural Air.

## 5. Reliability and Quality Control

**MTBF:** 300,000Hrs.(Calculated Hours at 25°C,By Telcordia SR-332)

## 6. Mechanical Requirement


**Case Dimension:** 151mm(L)\*64mm(W)\*36mm(H)

**Cable Type:** Black UL1185 18AWG

**Cable Length:** 1500mm

**Output Connector:** 5.5mm x 2.1mm x 12mm

**External Apperance:** As drawing below ( Scale → mm )

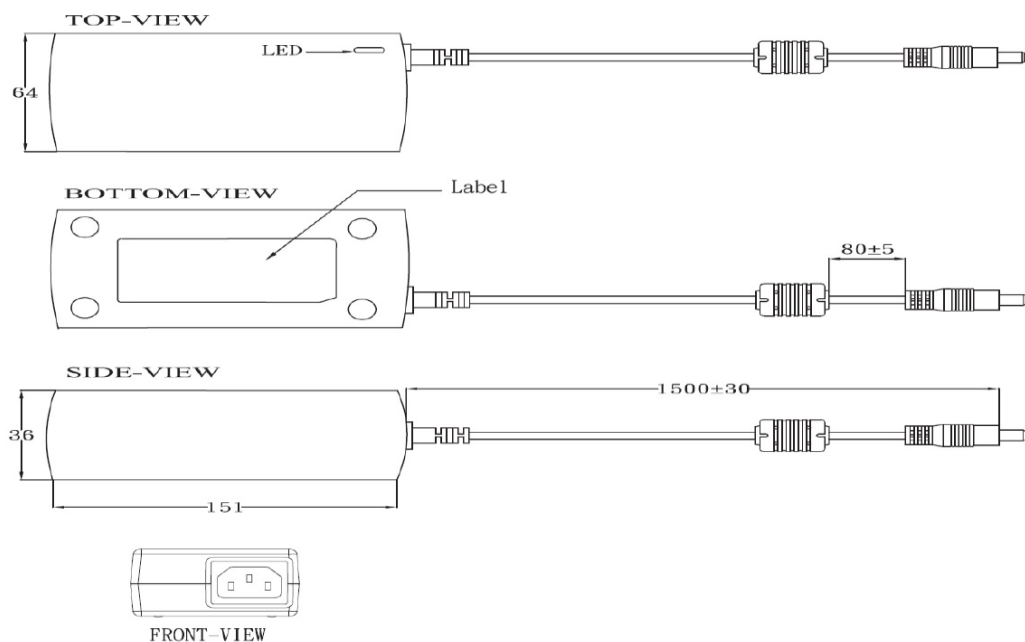

**DWG Control Number:**

**Revision:**

**Date:** 09/27/2017



## 7. Safety

### Safety Standard

The power supply shall be certified under the following international regulatory standards:  
UL / cUL / GS / CB / PSE / BSMI / RCM

### Insulation Resistance

Primary to Secondary	10 Mohm for 500Vdc
Primary to Frame Ground	10 Mohm for 500Vdc

### Dielectric Strength (Hi-Pot)

Primary to Secondary	3000Vac for 1 Minutes
Primary to Frame Ground	1500Vac for 1 Minutes

**Leakage Current:** Less than 3.5mA

**EMI Requirement:** CE / FCC Class B; Conduction & Radiation meet

**Grounding Test:** Resistance 0.1 ohm Max. @ 25A

**DWG Control Number:**

**Revision:**

**Date:** 09/27/2017